Table of Contents

IMPORTANT NOTES 2

1.0 INTRODUCTION 3
1.1 INSTALLATION SITE 4
1.2 INSTALLATION 5
1.3 ACCESSORIES 7
1.4 LED INDICATION EXPLANATIONS 7
2.0 LCD DESCRIPTION 8
2.1 OPERATION 8
2.1.1Enter into Setting Mode 10
2.1.2Battery Capacity(AH) Setting 11
2.1.3Battery Voltage Setting 12
2.1.4 Battery Over-voltage Limit Setting 13
2.1.5 Battery Under-Voltage Limit Setting 13
2.1.6 Pulse Charge Setting 14
2.1.7 Parallel Address Setting 15
2.1.8 Total Input Power(KWH)Setting: 15
2.1.9 Parameters Displayed 16
2.2 LCD DISPLAY EXPLANATIONS 16
2.3 ERROR CODES 17
3.0 PRODUCT SPECIFICATIONS 19

Important Notes

1. Keep this user's manual and follow all instructions indicated in the manual.
2. Don't overload the charger.
3. Don't split the charger apart; otherwise, your warranty is void.
4. Only authorized technician may repair or replace the interior components.
5. Make sure the ground of the load is connected properly. Otherwise, you may get electrical shock.
6. Keep the Solar charger clean and dry.
7. Make sure all the contacts with correct polarity to avoid from short circuit.
8. Following the instruction of the user's manual to use or configure the charger.

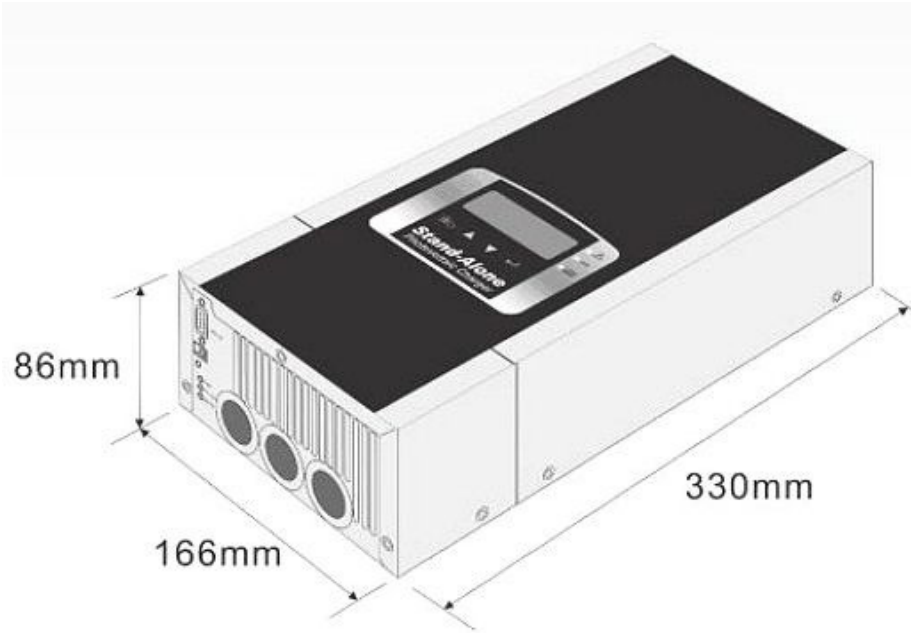

1.0 Introduction

PCM4048/PCM6048 solar chargers convert the energy, in forms of direct current electricity (DC) from solar panel to load or batteries connected. Depending on the configuration of the battery bank, the charger can support 12V, 24V, 36V or up to 48V system. With a maximum efficiency up to 95%, the solar charger utilizes technologies such as Maximum Power Point Tracking(MPPT) and pulse charging method to ensure the most energy is extracted from solar cells and relayed onto batteries. Via the built-in LCD display, it is easy to obtain system information such as input voltage/current, output voltage, battery temperature (with battery temperature compensation feature) and etc. Through its RS232 communication port, our monitoring software provide output voltage setting or record all relative parameters from the solar charger.

Figure 1: The front view of the Solar charger

Standard features of the solar charger:

- Maximum Power Point Tracking(MPPT) maximizes energy harvest from the PV array.
- Auto-selection Four-stage (Bulk/Pulse/Float1/Float2) charge mode to reduce 1~3 times charge time and maximize system performance.
- Easy-to-read LCD and four functional key pads for configuration and system monitoring.
- Maximum efficiency up to 95%.
- Input over-voltage and under-voltage protection, output over-current protection and back-feed protection with warning messages appeared on LCD and LED.
- Over-temperature protection and power derating when output power and ambient temp. are high.
- Battery temperature sensor automatically provides temperature compensated battery charging.
- Provide communication software to monitor the status of the charger.
- Smart fan speed Control according to the load connected.
- Intelligent charging scheme can automatically handles output voltage or operate based on user-specified values
- Allow multi devices in parallel.

1.1 Installation Site

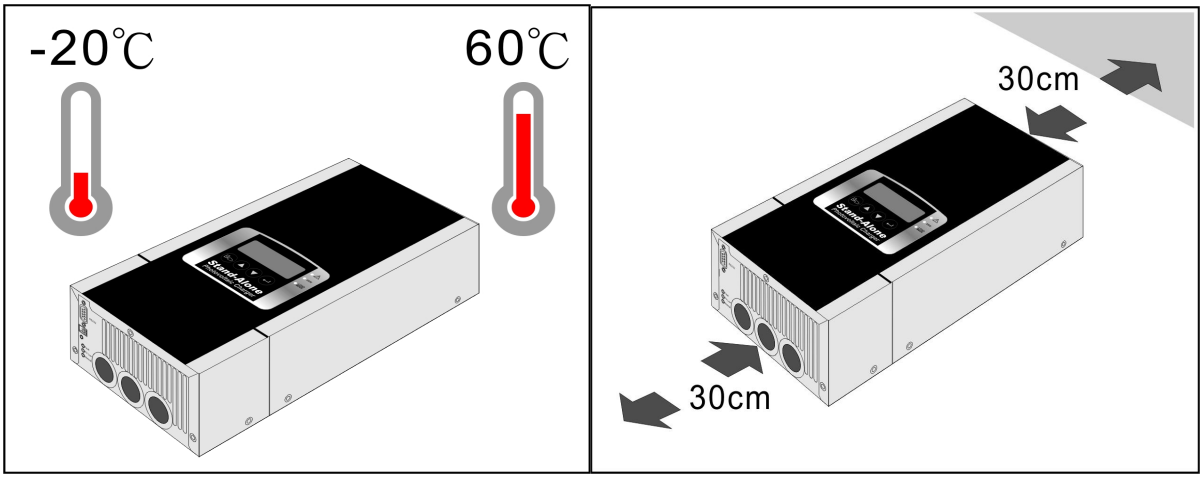

Figure 2: Installation Environment

Notice!

1.Inspect the charger upon receipt. This product is designed to be with robust packaging. However, accidents and damage may occur during transportation. Notify the forwarder or dealer if there is damage occurred. The packaging is recyclable; save it for reuse or dispose of it properly.

2.It is designed to be installed and commissioned in a sheltered controlled environment as follows:
--Operating temperature -20°C ~60°C.
--Always avoid from contact with direct sunlight.
--Install it away from objects that give off excessive heat and areas that are excessively wet. .
--Install it indoors as it is not designed for installation outdoors.

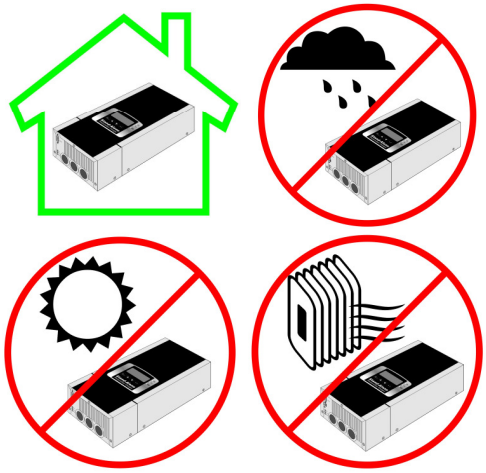

Figure 3: Installation Site

1.2 Installation

***⚠ BEFORE INSTALLATION, ENSURE YOUR PV ARRAY'S WORKING VOLTAGE EXCEED THE FOLLOWING VALUES IN ORDER TO POWER THE SOLAR CHARGER:**

For 12V / 24V systems: minimum 40V and above
For 36V systems: minimum 50V and above
For 48V systems: minimum 60V and above

***⚠ MAXIMUM ARRAY OPEN CIRCUIT VOLTAGE MUST NOT EXCEED 150V!**

Please remove the wiring compartment cover for installation as illustrated below. After installation, please fasten the cover back to its original position.

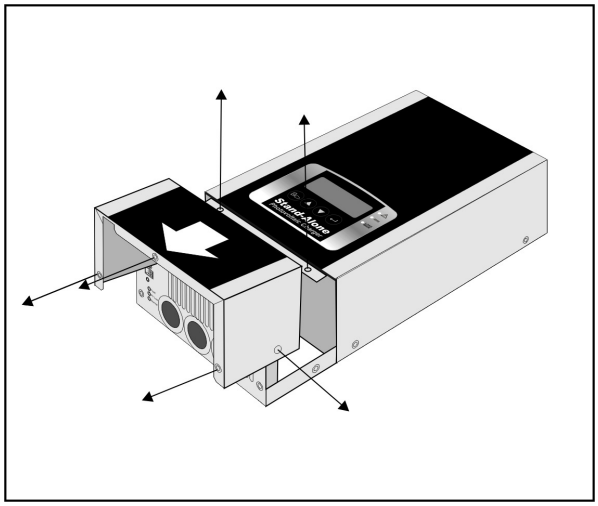

Figure 4: Disassemble Wiring Compartment Cover

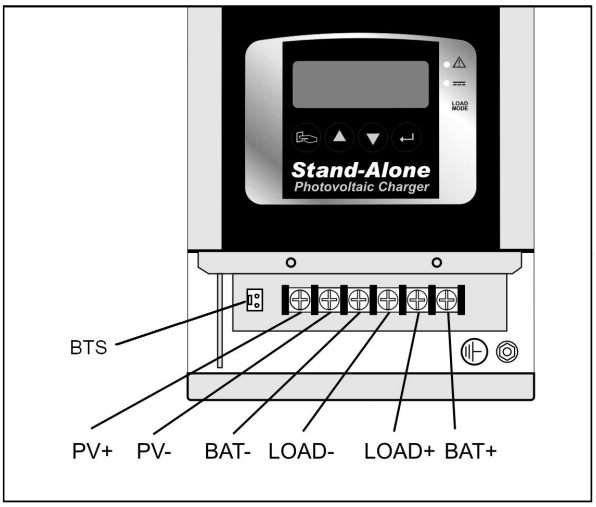

Figure 5: Cabling

Contact Description	
PV+	To the positive(+) of solar cell
PV-	To negative(-) of solar cell

Bat+	To the positive(+) of Bat. input
Bat-	To the negative(-) of Bat. input
Load+	To the positive(+) of Load
Load-	To the negative(-) of Load
BTS	Battery Temperature Sensor
	Ground

■Recommended Installation Sequence:

Connect Load → Battery → Solar Cell

■If there is no load connected

Connect Battery → Solar Cell

■Make sure the BTS wire is installed and fixed to the contact (**CN11**).

■It is recommended to remove battery & loads connected before entering into setting mode, as adjusting parameters under setting mode may have adverse effect on your battery.

Mode	Description	Remarks
Load Mode	Output without connecting with battery.	Output voltage via LCD panel is required to be set..
Charging Mode	Output connecting battery or connecting both battery and load.	Output voltage via LCD panel can be fixed or auto set.

Caution!

1. Make sure all cables are connected properly without short-circuiting.
2. There is 100A fuse inside the (BAT+).
3. Disconnect the Battery if there is no solar cell and load connected or if the solar cell is sheltered for a long while.
4. Do not overload the charger! Please refer to specification sheet to use the charger properly.
5. Make sure the voltage and capacity of the Battery is set correctly. Re battery setting, please refer to 2.1 Operation
6. Make sure the bat. Temperature compensation wire is installed and fixed where the battery is installed, not in the internal of the battery. Make sure the adhesive use is easy to conduct heat, so as to make sure the accuracy of the temperature compensation of the unit.

1.3 Accessories

1.Battery Compensation sire(BST) × 1 @ 150cm

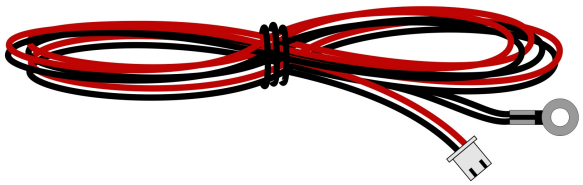

2.Connecting terminal to the solar panel(phi4-male) × 1

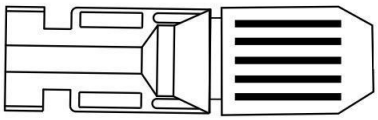

3.Connecting terminal to the solar panel(phi4-female) × 1



1.4 LED Indication Explanations

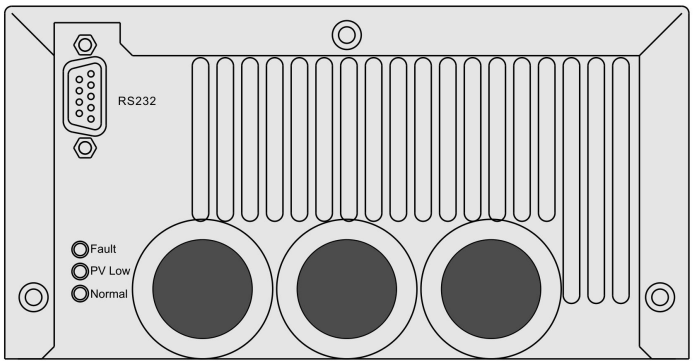

Figure 6: Bottom View

LED	Description
Fault (Red)	System Fault, Protection Circuit is activated.
PV Low (Amber)	Under-voltage/Over-voltage of Solar Cell
Normal (Green)	System Operation in Normal
RS232	RS232 Communication Interface

2.0 LCD Description

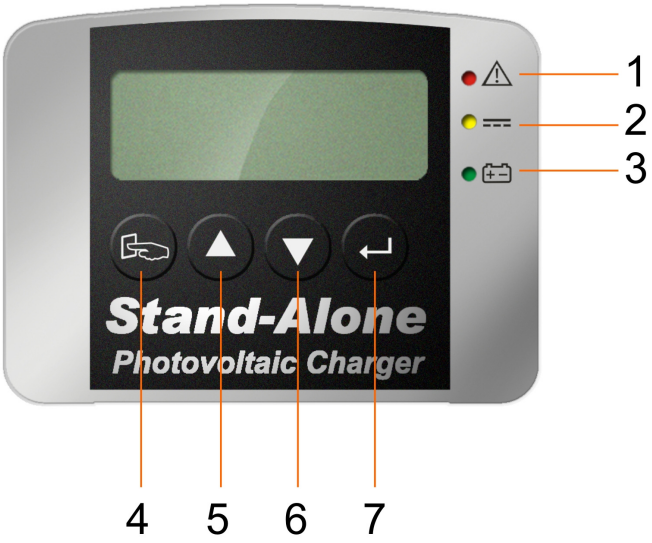

Item	Symbol	Description
1		System Fault, Charger goes to “Protection Mode” Error code shown on the LCD
2		Under-voltage/Over-voltage of Solar Cell
3		Charging Mode –Illuminate / Load Mode - Flash
4		Function Key (Left: push slightly; Return: push heavily)
5		Scroll Key-Up
6		Scroll Key-Down
7		Function Key (Right: push slightly; Enter: push heavily)

2.1 Operation

When the charger starts up normally, all the LED indicators will light up and the LCD display will show as follows (A):

A

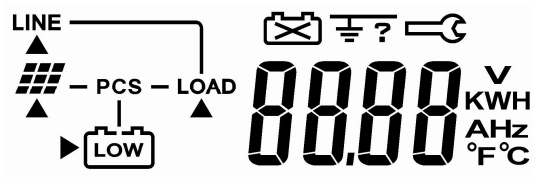

Approx. 3 seconds later, the LCD display will show as below (B) and the charger is under initialization.

B



When the charger is in normal operation, it shows the current input voltage of the solar panel as shown in C, then the green LED lights up to indicate that the charger is connected with batteries and also charges to the batteries. On the contrary, it shows that there are no batteries connected when the green LED is blinking and the output voltage is fixed.

C

If a problem arises during operation, the LCD display shows Er04 as shown below. For more detailed error code, please refer to Table 1 Error Code.

D

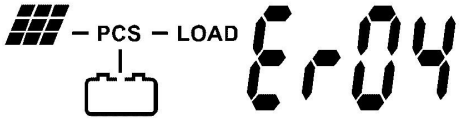

If there is over-voltage or under-voltage occurred during operation, the LCD display will show Alarm code as indicated below and the Amber LED lights up.

E

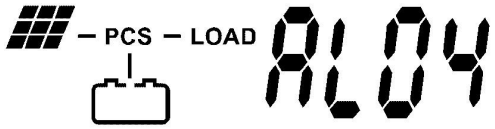

Press key to indicate the parallel address of the charger as shown in F and press key once again or wait for 10 seconds to go back to Main Menu.

F



After turning on the Solar charger, it will display current solar cells' voltage. If you would like to see other parameters, you may press key or key.

Caution: keys are of no use.

You may press or key to scroll up and down to get different display information and message.

Display	Description
	Input Voltage of Solar Panel, VDC
	Input Current of Solar Panel, A
	Input Power of Solar Panel, KW
	Total Input Power, KWH (stored in EEPROM)
	Battery Voltage, VDC
	Current supplied to batteries, A
	Current battery capacity set, AH
	Battery Temperature(℃)
	IGBT Temperature(℃)
	Battery Temperature(℉)
	IGBT Temperature(℉)

2.1.1Enter into Setting Mode

Make sure the output voltage and capacity of the battery are set properly.

⚠ **Caution!**

Before entering into setting mode, make sure the battery and the load are removed; otherwise, it might damage the battery and the load due to improper setting.

Step1: Make sure the charger is connected with solar cell with 40V~150Vdc voltage and do not turn on the charger yet.

Step2: Press and simultaneously, then turn on the charger. You may see the three LEDs on the front panel will light up and extinguish after 3 second. Then, “AH” text will be indicated on the LCD display, which means the charger is in setting mode now. If no “AH” text shown on the LCD, you need to repeat Step 2.

Step3: Press or to choose item to be set. Basically, you may set Battery Capacity(AH), Battery Voltage(BATT), Battery High Limit (BAUP), Battery Low Limit(BADW), Pulse Mode Setting(PULS), ID(ID), and total input power(KWH). Press to go to the desired item.

Display	Description
	Battery Capacity Setting, AH
	Battery Voltage Setting, VDC
	Battery Over-voltage Setting, VDC
	Battery Under-voltage Setting, VDC
	Pulse Charge Setting
	Parallel Address Setting
	Total Input Power(KWH) Setting, KWH

2.1.2Battery Capacity(AH) Setting

It is strongly recommended to enter the correct value for the battery capacity (based on 20-hr rating) before using the charger, as charging current for different sizes of batteries will be handled differently. If user does not enter any value for Battery Capacity, a default of **100Ah** will be selected.

Step1: It indicates the current battery capacity when getting into Battery Capacity setting.

Step2: Select desired battery capacity (AH) by scroll key or key. The digit with flashing cursor means the desired one to be changed. If you would like to change the left-hand/right-hand digit, you may press key or key respectively.

Step3: Battery Capacity(AH) is selectable from 1~999AH. When the desired capacity(AH) is selected, please press key to save till "SAVE" shown on the screen. When "SAVE" disappears on the screen, it means your setting is done successfully.

Step4: To escape from Battery Capacity(AH) setting, please press key for a while.

Caution: If there is ER39 shown on the LCD display after the setting is completed and a re-starting process is done, it means your setting is failed. Please proceed desired setting once again.

2.1.3Battery Voltage Setting

The selectable battery voltage settings are 12V, 24V, 36V, 48V or auto. The charger will check the selected voltage matched to the batteries connected. In case it is out of acceptable range, it will show it as battery out of order. Meanwhile, the user can self set battery under-voltage and battery over-voltage. When the **AUTO** setting is selected, the voltage window will be as below:

Battery Voltage	Auto Detecting Voltage Range	Self-Setting Voltage Range(default)
48V	44~56V	42~54.6V
36V	33~42V	28~40.9V
24V	22~28V	18~27.3V
12V	11~14V	9~13.6V

Step1: When enter into Battery Voltage setting, current battery voltage will be shown on the LCD display.

Step2: To select other battery voltage by scrolling key and key.

Step3: Battery voltage can be set as 12V, 24V, 36V, 48V or Auto. When the desired voltage is selected, please press key to save till "SAVE" shown on the screen. When "SAVE" disappears on the screen, it means your setting is done successfully.

Step4: To escape from Battery Voltage Setting, please press for a while.

Caution: If there is ER39 shown on the LCD display after the setting is completed and a re-starting process is done, it means your setting is failed. Please proceed desired setting once again.

2.1.4 Battery Over-voltage Limit Setting

In normal condition, it is not necessary to calibrate this setting as long as the battery voltage selected is within window. For example, if the user selects 24V, the default over-voltage is 27.3V. In case the battery voltage desired is higher than this voltage, you may calibrate battery voltage to be higher. Maximum value for this setting is 99V. The setting procedure is as below:

⚠ Caution!

In normal condition, it is not necessary to calibrate this setting. Before processing the setting, make sure the battery voltage setting is done properly to avoid damaging battery or load.

Step1: When entering into Battery Over-voltage setting, it shows the current battery over-voltage.

Step2: In case of any other desired voltage, please press key or key to choose the figure you prefer. The figure with blinking means the current place you are. To change the figure at left-hand side, please press key, on the contrary, you may press key to change the right-hand side.

Step3: After the battery over-voltage is selected, please press key to save till “SAVE” shown on the screen. When “SAVE” disappears on the screen, it means your setting is done successfully.

Step4: If you would like to escape from battery over- and under- voltage setting, please press key to escape.

2.1.5 Battery Under-Voltage Limit Setting

In normal condition, it is not necessary to calibrate this setting as long as the battery voltage selected is within window. For example, if the user selects 24V, the default under-voltage is 18V. In case the battery voltage desired is lower than this voltage, you may calibrate battery voltage to be lower. Minimum value for this setting is 6V. The setting procedure is as below:

⚠ Caution!

In normal condition, it is not necessary to calibrate this setting. Before processing the setting, make sure the battery voltage setting is done properly to avoid damaging battery or load.

Step1: When entering into Battery Over-voltage setting, it shows the current battery under-voltage.

Step2: In case of any other desired voltage, please press key or key to choose the figure you prefer. The figure with blinking means the current place you are. To change the figure at left-hand side, please press key, on the contrary, you may press key to change the right-hand side.

Step3: After the battery under-voltage is selected, please press key till "SAVE" shown on the screen new parameter. If the "SAVE" extinguishes from the screen and show "OVER" instead. It means the voltage selected is higher than the battery's over-voltage.

Step4: If you would like to escape from battery over- and under- voltage setting, please press key to escape.

2.1.6 Pulse Charge Setting

This setting enables user to turn on or off the Pulse Charge feature. When enabled, pulse charging will allow 0.9C of maximum charging current into battery, allowing batteries to be charged quickly and efficiently. By default, this mode is ON. Setting procedure is as below:

Step1: Step1: Enter into Pulse Charge Setting. If it shows "ON" it means the charger is able to be in Pulse Charge; on the contrary, it means the charger is not able to be in Pulse Charge if it shows "OFF".

Step2: You may select "ON" or "OFF" by pressing key or key, then press key to save till "SAVE" shown on the screen. When "SAVE" disappears on the screen, it means your setting is done successfully.

Step3: You may escape from this setting by pressing key.

NOTE:

1. certain sophisticated equipment may be susceptible to RF interference generated as a result of the ripples caused by Pulse Charging. Pulse charging may be switched off using this setting.
2. when pulse charging is switched off, the charger will engage in bulk/float1/float2 charging scheme. Maximum bulk charging current is 0.3C.

2.1.7 Parallel Address Setting

NOTE: this setting is normally not required unless user requires parallel connection of multiple solar chargers and wishes to enable communication between the chargers. Simple parallel connections of individual solar chargers without communication do not require this setting. For details on how to employ the parallel address features, please consult your network engineer.

When there are several chargers in parallel, you may proceed the setting as below:

Step1: Enter to Parallel Address Setting, then the charger will show the address of the charger in parallel.

Step2: To select other desired parallel address, you may press key or key to choose the figure you prefer. The figure with blinking means the current place you are. To change the figure at left-hand side, please press key, on the contrary, you may press key to change the right-hand side.

Step3: The selectable range of the parallel address is 1~254. When the desired parallel address is selected, please press key to save till "SAVE" shown on the screen. When "SAVE" disappears on the screen, it means your setting is done successfully.

Step4: You may escape from this setting by pressing key

2.1.8 Total Input Power(KWH) Setting:

This setting is used to record the total input power, in KWH, that the solar charger has received since its operation. This value is monitored and stored periodically in the EEPROM. To set the initial value of the total input power(KWH), user may set the total input power to "zero" or "certain value". The setting method is as below:

Step1: Enter into total input power setting, it shows "0000"。

Step2: If you would like to set other initial value, you may use key or key to select desired value. When the figure selected is blinking, it means the figure that you may change. "K" at the right-hand side means "1000"times, so if the screen shows 123K means 123000 KWH. If you would like to change the left-hand figure, you may press key and the right-hand figure, you may press key.

Step3: The range of the total input power can be selected from 0~999K KWH. Once the figure is selected, you may press key to save. Make sure the "SAVE" shown on the screen,

then you may release key now. When “SAVE” disappears on the screen, it means your “save” is done successfully.

Step4: You may escape from this setting by pressing key

2.1.9 Parameters Displayed

Step1: After turning on the Solar charger, it will display current solar cells’ voltage. If you would like to see other parameters, you may press key or key.

Step2: The LCD can show the following data, such as the voltage of the solar cells, the input voltage/current of the solar cells, the input power of the solar cells, battery voltage/current, Battery Capacity set(AH), charger temperature and battery temperature.

Caution: keys are of no use.

2.2 LCD Display Explanations

Display	Description
	Input Voltage from Solar Cells
	Input Current from Solar Cells
	Input Power from Solar Cells
	Total Input Power of the solar Cells
	Battery Voltage
	Current supplied to Battery
	Current Battery Capacity Setting
	Battery Temperature in Celsius

	IGBT temperature in Celsius
	Battery Temperature in Fahrenheit
	IGBT temperature in Fahrenheit
	Battery Capacity Setting Directory
	Battery Voltage Setting Directory
	Battery Over-voltage Setting
	Battery Under-voltage Setting
	Pulse Charge Setting
	Parallel Address Setting
	Total Input Power(KWH) Setting
	Battery Capacity configuration
	Battery Voltage configuration
	New parameters set are under saving.

2.3 Error Codes

When the charger is not working normally, it will show the error code on the LCD display as Table 1. You may proceed troubleshooting indicated as below.

Error Code	Description	Trouble Shooting
AL04	Input Over-voltage	Reduce input voltage
AL05	Input Under-voltage	Increase input voltage
ER04	Battery Voltage different	Ensure battery voltage and proceed

	from Setting	setting
ER11	Input over power	Decrease solar power (Watt) or reduce load connected
ER13	Output Short Circuit	Check to see if the output short circuit is removed.
ER17	EEPROM Error	Consult with your local agent
ER18	Over-heat	Reduce the ambient temperature and reduce load connected.
ER25	Input Over-current	Decrease solar power(Watt) or reduce load connected.
ER28	Output Voltage too high	Re-start the charger
ER32	Memory Error	Re-start the charger
ER33	Charger is self-locked	Check to see if the operation condition is complied with what the charger requires.
ER34	Crystal damage	Consult with your local agent
ER35	Output voltage too low	The charger will be automatically re-start after 15 seconds.
ER36	Bat. Over-heat	Reduce the environmental temperature of the battery
ER37	Fan out of order	Check to see if fan is blocked.
ER38	AUTO Function Enable	Reset the output voltage manually
ER39	Failure in “save”	Re-setting

Table 1 Error Code

⚠ Caution!

Before any troubleshooting is on process, make sure the solar panels and batteries are disconnected. If the error code still exists, please consult with your local agent.

3.0 Product Specifications

Models	PCM4048	PCM6048
Input		
Rated Voltage	40~120Vdc	
Operating Voltage / MPPT Range	40~120 Vdc @ 12V / 24V 50~120 Vdc @ 36V 60~120 Vdc @ 48V	
Max. Input current	25 A	35 A
Max. PV Array Open Circuit Voltage	150 Vdc	
Max. PV Array Power	1000W	1500W
Output		
Battery Voltage	12 / 24 / 36 / 48Vdc	
Max. Charger / Output Current	40 A	60 A
Ripple Voltage	< ± 1V	
Max. Efficiency	95%	
Charge regulation modes	Bulk / Pulse / Float1/Float2 or Bulk / Float1/Float2	
Display		
Status on LCD	Solar Cell Input Voltage / Solar Cell Input Current/Solar Cell Input Power /Bat. Voltage /Bat. Current /Bat. AH/ IGBT temperature /Bat. temperature/ Voltage setting table, etc.	
Status on LED	Normal/Fault/PV Low	
Protection		
Overload	>110% shutdown	>105% shutdown
Short Circuit at load side	Output current>60A shutdown	
Solar Cell Polarity Error Protection	Yes	
Battery Temperature Compensation	–3.3mV/ºC/cell	
Standby Power Consumption	0 W	
Total Power Consumption While Operating	3.5 W	
Visible Alarms	Fault, PV Low, Bat. Abnormal, etc.	
PHYSICALS CHARACTERISTICS		
Mechanical Dimensions WxHxD mm	165x85x330 mm (2U height)	
Input/Output Connectors	Hardwire (Terminal Block)	
Enclosure Type	IP20	
Net Weight (Kgs)	3.2 Kgs	
ENVIRONMENT		
Operating Temperature	-20℃ to +60℃	
Storage Temperature	-40℃ to +85℃	
Altitude	0-2000M up to 60℃; 0~3000M up to 55℃	
Humidity	100% RH Maximum, No Condensing	
INTERFACE COMPUTER		
Type	Standard RS232	
COMPLIANCE		
Quality	ISO9001	
Standard EMC	EN61000-6-1, EN61000-6-3	
Marking	CE	